



19" server compact cabinets RMA

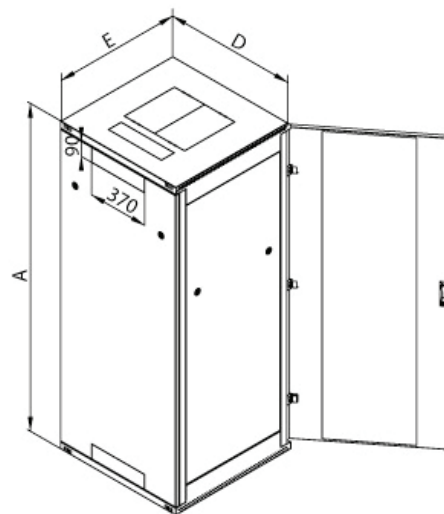

features

- welded construction with IP20 protection
- removable and lockable side panels and rear cover enable an easy access to the installed devices
- front vertical rails are continuously adjustable
- frame of the cabinet and all removable parts are connected with earthing cables
- cable openings covered with breakout-type blanking panels located at the top, bottom and rear part of the cabinet
- breakout-type blanking panels for fan units are located in the top and bottom of the cabinet
- nivelation feet (standard)
- castors RAX-MS-X81-X1 and base with filter RAB-PO-XXX-XN, RAC-PO-XXX-XN available upon request
- stabilizing footing RAX-SS-X04-X1 available upon request (applies to cabinets with base only)
- sliding vertical rails installation in a span of 19", 21" or 23" (only in case of cabinets with width of 800 mm)
- protective blanking panel with a brush to seal the cabinet opening against dust penetration (1 pc)
- set of M6 screws and captive nuts (16 pcs)

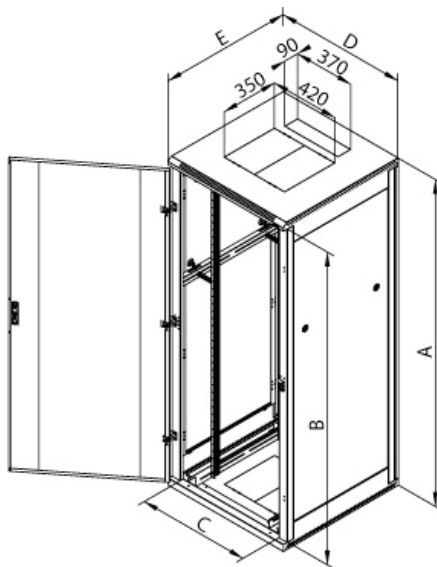

Color	black RAL9005
Surface	structured, matt



width 600 mm, depth 900 mm

- perforated single door with air permeability of 80%

42U P/N: [RMA-42-L69-BAY-A1-OZA](#)

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
1970	1868	487	600	900	85,8	400



width 600 mm, depth 900 mm

- single door, hardened smoked glass

42U P/N: [RMA-42-A69-BAY-A1-OZA](#)

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
1970	1868	487	600	900	90,8	400



width 800 mm, depth 1000 mm

- single door, hardened smoked glass

27U P/N: [RMA-27-A81-BAY-A1-OZA](#)

45U P/N: [RMA-45-A81-BAY-A1-OZA](#)

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	weight (kg)	capacity (kg)
1300	1198	487	800	1000	81,2	400
2105	1868	487	800	1000	115,6	400